012-18-000004.

BRUHAT BANGALORE MAHANAGARA PALIKE, DASARAHALLI ZONE

Executive Engineeer
Dasarahalli Division
B.B.M.P., Bangalore

SCHEDULE- B

Name of Work :Improvements to Roads and Drains at Vinayakanagar cross road and Surrounding area in Ward No 12 Shettyhalli, Shettyhalli Sub Division

Sl. No.	Description	Unit	Qty	Approved Rates	
				In Figures	In Words
1	**Earthwork excavation by manual means in ordinary** soil invoiving in average horizontal throw up to 2m & an average lift upto 1.5m , excavated surface leveled & sides neatly dressed , the disposed earth to be levelled neatly after breaking of clods complete as per specifications and directions of engineer in charge of the work	**Cum**	**690.00**	175.96	Rs one hundred seventy five and paise ninetysix only
2	**Providing and laying in position plain cement concrete of mix 1:4:8 with** OPC cement @ 180kgs, with 40mm and down size graded granite metal coarse aggregates @0.85cum and fine aggregates @ 0.57cum machine mixed, machine mixed, concrete laid in layers not exceeding 15 cms. thick, well compacted, in foundation, including cost of all materials, labour, HOM of machinery, curing complete as per specifications. and directions of engineer in charge of the work	**Cum**	**96.89**	5159.02	Rs five thousand one hundred fifty nine and paise two only
3	KSRB 4.2.2 : **Providing and laying in position reinforced cement concrete of design mix M20** with OPC cement @ 320kgs, with with 20mm and down size graded granite metal, coarse aggregate @ 0.69 cum and fine aggregates @ .460cum, with super plasticisers @ 3 liters confirming to is 9103-1999 reafairmed -2008, machine mixed, concrete laid in layers not exceeding 15 cms thick, vibrated for all works in foundation for footings,pedastals,retaining walls, staircase, retaining walls, return walls, walls (any thickness) including attached plasters, columns, piers, abutments, pillars, posts, struts, buttresses, string or lacing courses, parapets, bed blocks, anchor blocks, plain window cills, fillets etc., including cost of all materials, labour, HOM of machinery, curing,complete as per specifications. and directions of engineer in charge of the work	cum	**226.56**	6371.66	Rs six thousand three hundred seventy one and paise sixty six only
4	**Providing and removing centering, shuttering,** strutting,. propping etc., and removal of form work for vertical surface such as walls at any thickness, including attached1 pilasters, buttresses, plinth cilis and string courses cost of all materials, labour complete as per specifications and directions of engineer in charge of the work	**sqm**	**1724.40**	310.58	Rs three hundred ten and paise fifty eight only

EXECUTIVE ENGINEER-4
KRIDL, BBMP DIVISION
BENGALURU-560 010

Signature of the Contractor

Executive Engineer
Dasarahally Division

Scanned by CamScanner

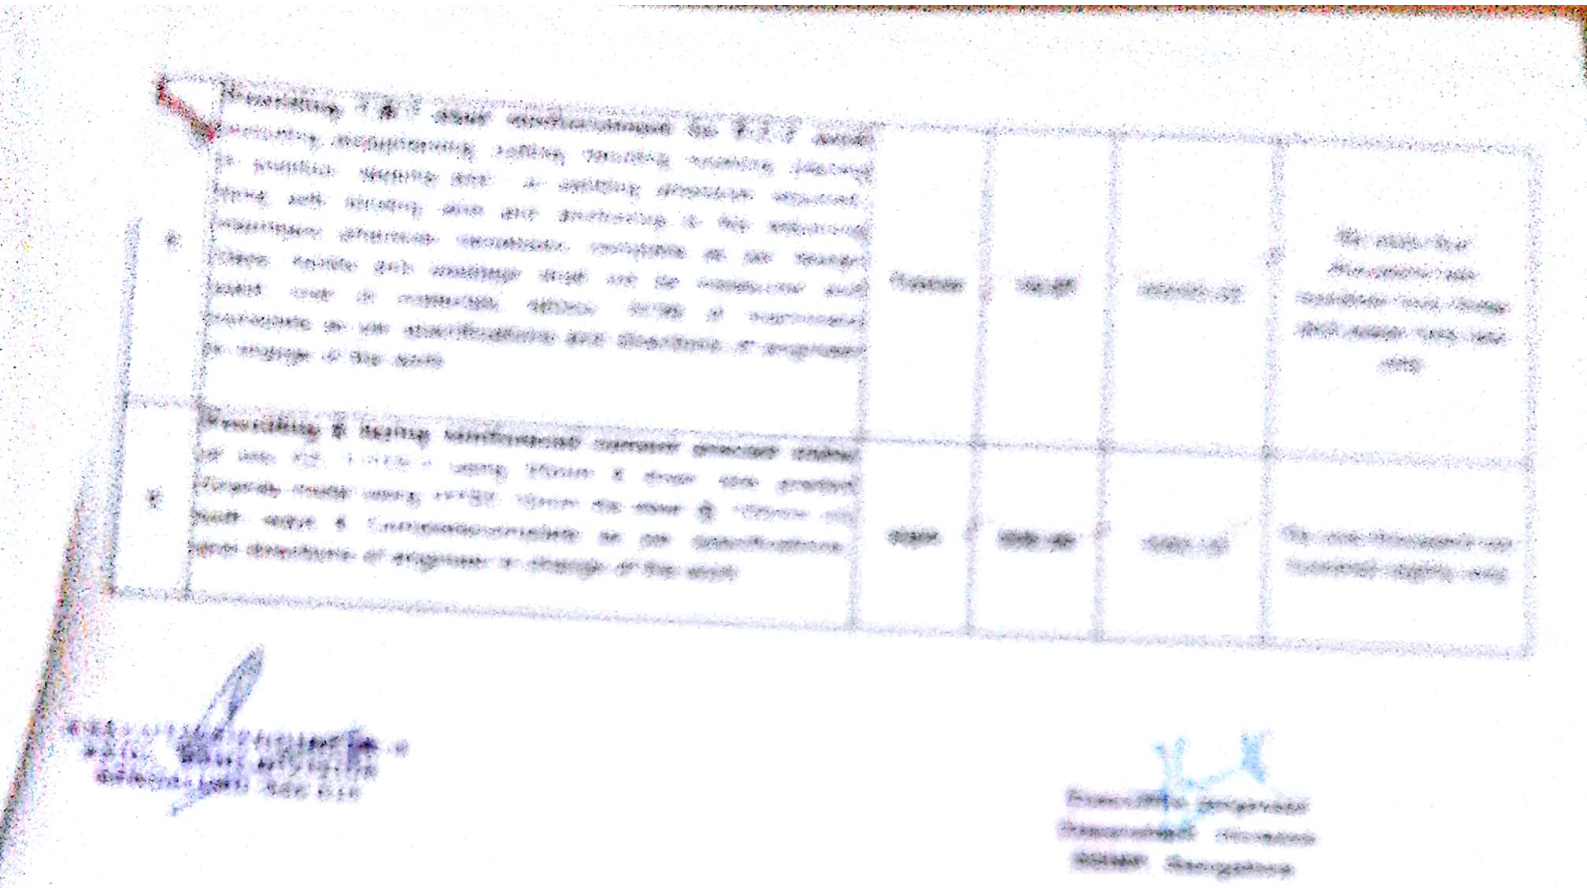

Scanned by CamScanner